



DIN 1480

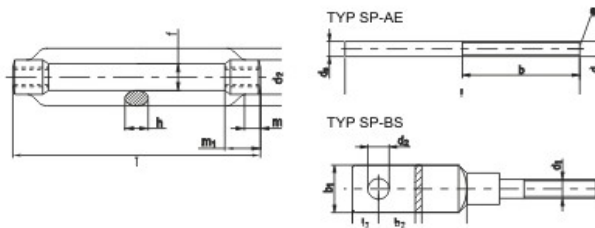

Wymiar	M 6	M 8	M 10	M 12	M 14*	M 16	M 20
d_2	12	15	18	21	25	27	34
e	19	23	30	34	38	42	52
h_{min}	6	8	9	11	10	14	17
l_1	110	110	125	125	140	170	200
m_1	12	15	18	21	24	27	34
m_2	6	8	9	11	9	14	17
regulacja	80	75	85	80	92	110	130
wytrzymałość typ AE [kN]	5.7	10	16	24	32	44	69
d_3	-	-	-	13	-	12.5	16.5
b_1	-	-	-	30	-	40	50
l_3	-	-	-	16	-	20.5	27
b_2	-	-	-	4	-	5	5
l_2	-	-	-	80	-	130	130
wytrzymałość typ BS [kN]	-	-	-	9.3	-	11.2	14.8

Wymiar	M 22*	M 24	M 27*	M 30	M 36	M 42	M 48
d_2	36	39	45	45	55	63	80
e	57	60	74	74	86	104	135
h_{min}	16	20	20	23	28	32	40
l_1	220	255	255	255	295	330	355
m_1	37	39	42	45	55	63	78
m_2	15	20	22	23	28	32	39
regulacja	146	170	171	160	180	200	195
wytrzymałość typ AE [kN]	85	100	129	158	230	-	-
d_3	-	22	-	-	-	-	-
b_1	-	70	-	-	-	-	-
l_3	-	43	-	-	-	-	-
b_2	-	7	-	-	-	-	-
l_2	-	145	-	-	-	-	-
wytrzymałość typ BS [kN]	-	27.6	-	-	-	-	-

