


DIN 603

$b_1 \leq 125 \text{ mm}$   
 $b_2 \leq 200 \text{ mm}$   
 $b_3 > 200 \text{ mm}$



Wymiar	M 5	M 6	M 8	M 10	M 12	M 16	M 20
$d_k$	13.5	16.55	20.65	24.65	30.65	38.8	46.8
$k$	3.3	3.88	4.88	5.38	6.95	8.95	11.05
$f$	4.1	4.6	5.6	6.6	8.75	12.9	15.9
$v$	5.48	6.48	8.58	10.58	12.7	16.7	20.84
$b_1$	16	18	22	26	30	38	46
$b_2$	22	24	28	32	36	44	52
$b_3$	-	-	41	45	49	57	65

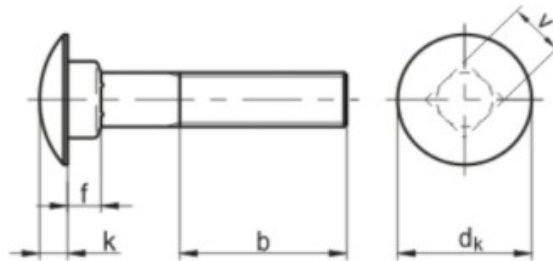