


DIN 963

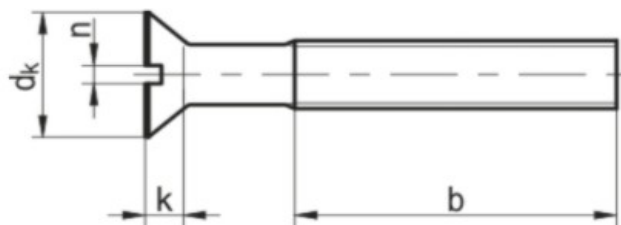

Wymiar	M 1	M 1.2	M 1.4	M 1.6	M 2	M 2.5
d_k ISO/DIN	1.9	2.3	2.6	3	3.8	4.7
k ISO/DIN	0.6	0.72	0.84	1/0.96	1.2	1.5
b^* -	1)	1)	1)	15	16	18
n	0.25	0.3	0.3	0.4	0.5	0.6

Wymiar	M 3	M 3.5	M 4	M 5	M 6	M 8
d_k ISO/DIN	5.5/5.6	7.3/6.5	8.4/7.5	9.3/9.2	11.3/11	15.8/14.5
k ISO/DIN	1.65	2.35/1.93	2.7/2.2	2.7/2.5	3.3/3	4.65/4
b^* -	19	38	22	25	28	34
n	0.8	1	1.2	1.2	1.6	2

Wymiar	M 10	M 12	M 16	M 20
d_k ISO/DIN	18.3/18	22	29	36
k ISO/DIN	5	6	8	10
b^* -	40	46	58	70
n	2.5	3	4	5

*minimalne długości

1) tylko z gwintem blisko łba

